

4K60p UHD HDMI SPLITTERS

AUGUSTUS

SERIES 662010-662019



1x8 4K HDMI Splitter

Available in 8-Port, 4-Port & 2-Port

Take high definition audio and video from a single HDMI source device, such as BrightSign media players, and distribute it to multiple UHD TVs, UHD displays or UHD projectors using Augustus Enterprises' proven UHD HDMI Splitters.

- Augustus HDMI splitters are specially designed for the unique requirements of retail and commercial installations for digital signage and TV demonstration where the highest quality video signal must be maintained
- Supports resolutions up to 4096x2160p@60Hz frame rates
- Supports HDR, HDR10 and Dolby Vision color at up to 18Gbps
- Splitters are available in 1x8, 1x4 and 1x2 input/output configurations
- Designed to distribute CEC commands of the source device to multiple displays
- Metal construction with secure mounting brackets



18 Gbps

18 Gbps

4K

4K

HDMI 2.0

HDMI 2.0

8-Port Splitter


4-Port Splitter

2-Port Splitter

4K60p UHD HDMI SPLITTERS

AUGUSTUS

Model No.	662018	662019	662014	662015	662010	662011
Product Description	4K HDR HDMI 2.0 Splitter 1x8		4K HDR HDMI 2.0 Splitter 1x4		4K HDR HDMI 2.0 Splitter 1x2	
HDCP Version	HDCP2.2					
CEC Commands Enabled	--	yes	--	yes	--	yes
Input Channel	1-Port HDMI					
Output Channel	8-Port HDMI		4-Port HDMI		2-Port HDMI	
Video Format	4K@60Hz/4K@30Hz/1080p/1080i/720p/576p/576i/480p/480i Supports HDR, HDR10 and Dolby Vision					
Cascade	Supports One Layer					
Deep Color	8bit, 10bit or 12bit					
Audio Format	Dolby HD/DTS HD/Dolby Atmos/Dolby AC3/DTS/LPCM					
Max Transmission Bandwidth	600MHz					
Max Transmission Rate	18Gbps					
Input Cable Length	2160p/AWG 26 ≤ 5m; 1080p/AWG 26 ≤ 10m					
Output Cable Length	2160p/AWG 26 ≤ 5m; 1080p/AWG 26 ≤ 12m					
Power Adapter Specification	Input: AC 100-240V Output: DC 5V/2A					
Max Working Current	1000mA					
Working Temperature Range	-5° to 40°C					
Working Humidity Range	5 to 85%RH (No Condensation)					
Storage Temperature	-15° to 55°C					
Storage Humidity	5 to 95%RH (No Condensation)					
Housing Material	Metal					
Size	280x136x25 (mm)		139x64x22 (mm)		96x53x21 (mm)	
Weight	882g / 1 lb 15 oz		220g / 8 oz		133g / 5 oz	
Included Accessories	Power Adapter					

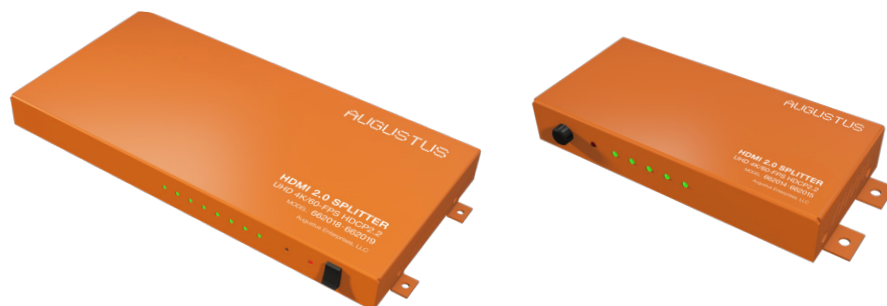

2-Port splitter not shown

AUGUSTUS

Augustus Enterprises, LLC.

55 Grant Street

Ramsey, NJ 07446

201.786.0404

201.786.0410 Fax

sales@augustusenterprises.com

www.augustusenterprises.com

© 2020, Augustus Enterprises, LLC. All other company names and products are trademarks or registered trademarks of their respective companies. We reserve the right to introduce modifications without notice. Dimensions are approximate.

AE662010-19_Series_SpecSheet_2020-09-15_v9